
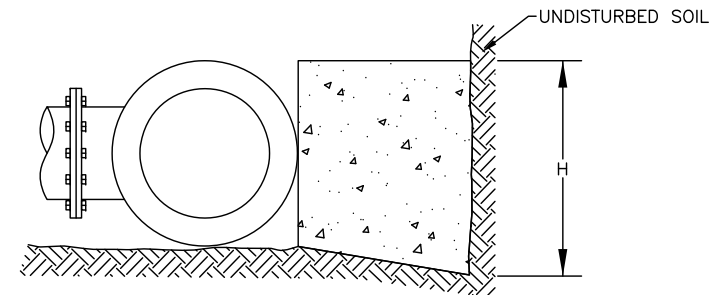


NOTES:

1. TAPPING SADDLES ARE NOT ALLOWED FOR MAIN-ON-MAIN TAPS.
2. THE FOLLOWING TAPPING SLEEVES ARE APPROVED PRODUCTS:
 - 4" THROUGH 24" - MUELLER H-615 OR AMERICAN FLOW CONTROL SERIES 2800.
 - 30" THROUGH 36" - AMERICAN FLOW CONTROL SERIES 2800 OR JCM 414 FABRICATED MECHANICAL JOINT WITH FUSION BONDED EPOXY COATING.
3. USE THRUST BLOCKING ONLY FOR WET TAPS UNLESS OTHERWISE APPROVED BY GREER CPW.
4. DEPTH FROM GROUND SURFACE TO TOP OF BLOCKING SHALL BE GREATER THAN THE HEIGHT OF THE BLOCKING.
5. THE END OF THE TAPPING SLEEVE SHALL BE NO CLOSER THAN 4 FEET TO A JOINT.

TAP SIZE	DIMENSIONS IN FEET		
	W	H	D
4" & 6"	2.0	1.4	1.0
8"	3.5	2.0	1.4
10"	4.0	2.5	1.8
12"	5.0	3.0	2.5

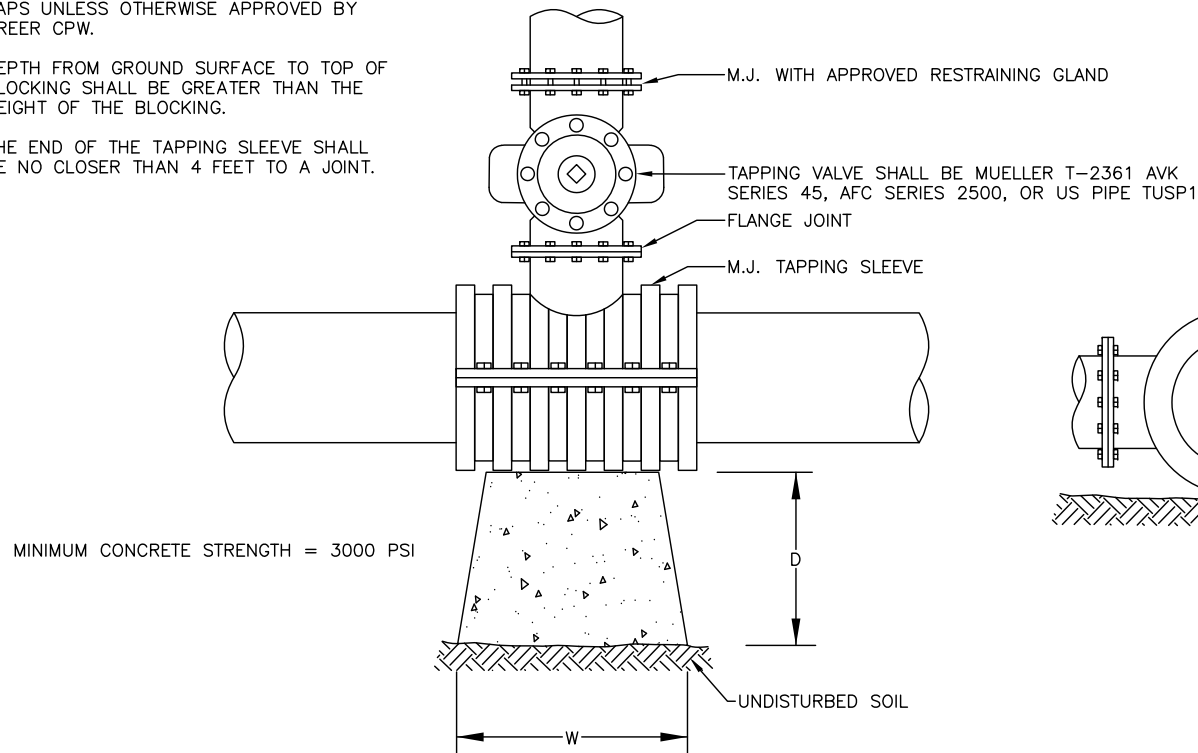

GREER COMMISSION OF PUBLIC WORKS

TYPICAL TAPPING SLEEVE AND VALVE DETAIL

APPROVED BY:		DATE:	DRAWING NO.
SCALE:		REVISD:	
NTS			W-3